



# 产品规格书

## PRODUCT SPECIFICATION

客户名称Buyer Name	
客户料号Buyer Part No.	
客户承认签章 Buyers Approval & Signatures	

文件编号Spec No.		版本	A/0
品名描述 Product Description	LRA 扁平振动马达 LRA Coin vibration motor		
型号Part No.	VG0640002D		
送样日期Date			
设计Designed by	审核Checked by	批准Approved by	
陳满	陈北叶		
2022.04.15	2022.04.15	2022.04.15	

www.vybronic.com  
sales@vybronic.com

## **Contents of Specification**

1. Revision History
2. Applications
3. Storage, Operating Temperature Conditions
4. Measurement Conditions, Input Voltage
5. Specifications
6. Reliability Test
7. Caution for Use
8. SPEC Drawing
9. Packing

## 1. Revision History

修改号 Rev. No.	日期 Rev. Date	页码 Page No.	修改项目 Revised Item	更改原因 Reason
A/0	2022.04.15	/	产品颁布/ Release for Production	

## 2. Application

This specification provided structure, function and usage condition of Linear Vibrator used in mobile communication devices for silence call. Linear Vibrator is designed and manufactured by Vybronic.

## 3. Operating , Storage Temperature /Humidity Conditions

No	Item	Condition
3-1	Operating Temperature Range	-20°C ~ +70°C
3-2	Storage Temperature Range	-40°C ~ +85°C

## 4. Measurement Conditions

NO	Item	Condition
4-1	Temperature	20 ± 5°C
4-2	Humidity	65 ± 20%RH
4-3	Rated Input Voltage	1.8Vrms AC, Sinewave
4-4	Input Voltage Range	0.5 ~ 1.8 Vrms AC
4-5	Input Frequency	210±0.1Hz
4-6	Operating Attitude	Refer to Figure 1

## ※ Measurement Method

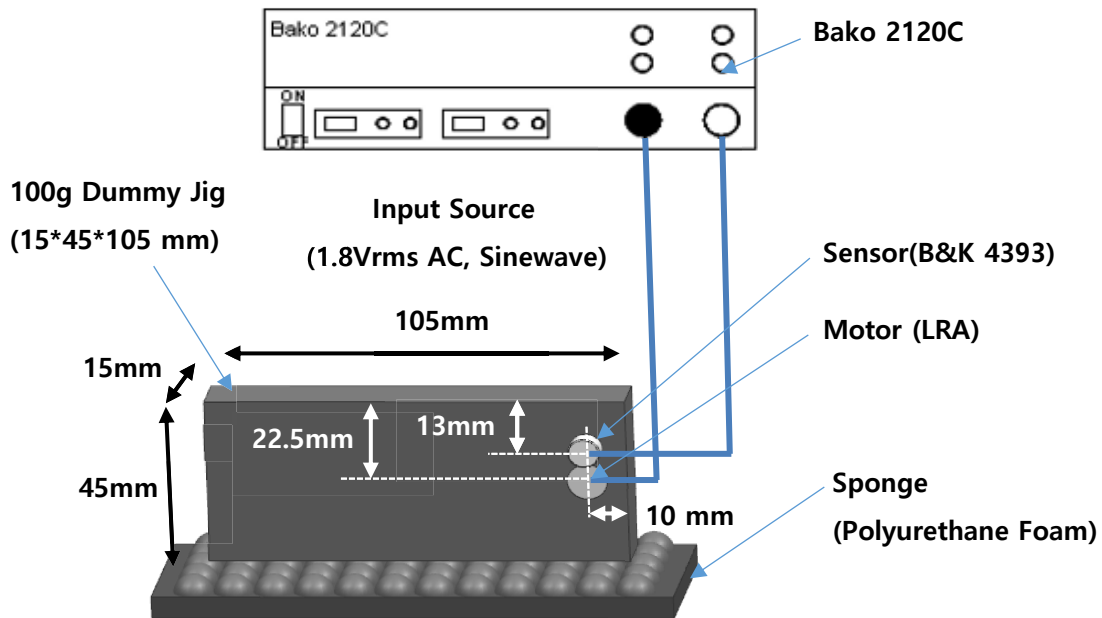


Figure 1. An Example of Measurement Method of Linear Vibrator

### ☐ Position of Linear Vibrator and Accelerometer (Refer to Figure 1)

- Linear Vibrator should be mounted to vibrate 15mm direction (y-direction) of Jig.
- Accelerometer also should be installed to measure y-direction vibration of Jig

### ☐ Position of Dummy Jig



- 15mm\*105mm plane of Dummy Jig should be located on Sponge
- At measurement of acceleration, Dummy Jig should be stabilized


### ☐ Measurement of Acceleration

- Acceleration should be measured 2~3 second later when source inputed.
- For the precise measurement, Acceleration should be measured 3 times and adopted average value on each Linear Vibrator

## 5. Specifications

NO	Item	Specification
5-1	Resistance	<b>25.0Ω ± 15%</b>
5-2	Rated Current	<b>Max 75 mArms</b> (Input Source : 210Hz, 1.8Vrms AC, sinewave)
5-3	Acceleration	<b>Min 0.40~0.90 Grms</b> (Input Source : 210Hz, 1.8Vrms AC, sinewave)
5-4	Frequency Characteristics	<b>Refer to Graph 1</b>
5-5	Motor Height	<b>4.05 ± 0.05mm</b> - Put the Case of the motor on JIG, after Zero setting, and measure center point of Bracket by Height Gauge.
5-6	Mass	<b>Mass of Motor : 0.67 gr</b>
5-7	Noise by mechanical touch (Noise_T)	<b>■ SPEC : Max 35dB</b> (Input Source : 210Hz, 1.8Vrms AC, sinewave)
5-8	Insulation Resistance	<b>Min 10 Mega Ohm</b> (100V DC input, between Case and terminal)

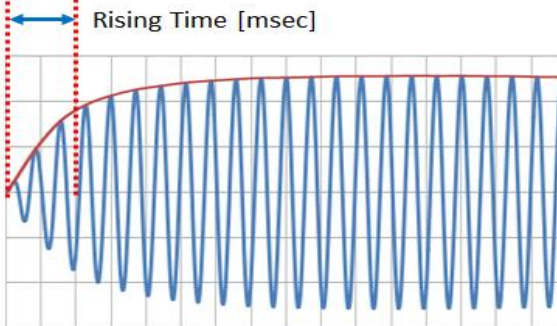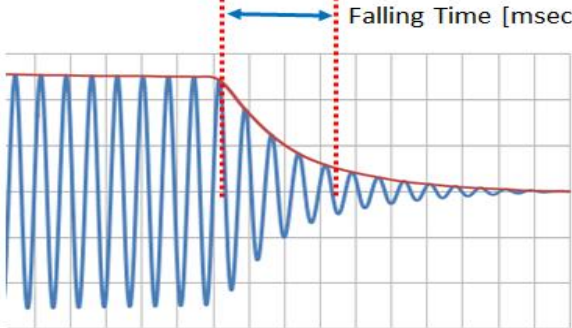NO	Item	Specification
5-9	Rising Time	<p><b>Max 15msec (50% of Acceleration)</b></p> 
5-10	Falling Time	<p><b>Max 70msec (10% of Acceleration)</b></p> 

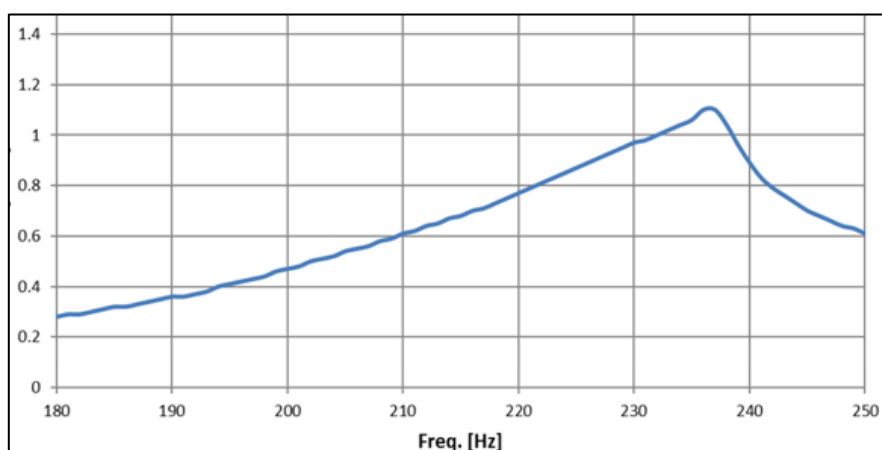

Graph 1. Linear Vibrator Frequency Characteristics

## 6. Reliability Test Condition

NO	Item	Conditions
6-1	Life test	Operating at rated input voltage (1.8Vrms AC, Sinewave), input frequency (210Hz) for 500,000cycle, on(2sec)/off(1sec).
6-2	Thermal shock test	-40°C ~ 85°C in each of 2Hrs(1cycle), Total 15cycles. Transition time is 5 minutes max. After the test, the Vibrator should be measured after room-temperature storage for 4Hrs.
6-3	High temperature storage test	+70°C, 168Hrs, After the test, the Vibrator should be measured after room-temperature storage for 4Hrs.
6-4	Low temperature storage test	-30°C, 168Hrs, After the test, the Vibrator should be measured after room-temperature storage for 4Hrs.
6-5	Static humidity test	+50°C, 95%RH, 120Hrs, After the test, the Vibrator should be measured after room-temperature storage for 4Hrs.
6-6	Vibration test	Vibrator that is attached to a 120 gram dummy jig is vibrated with 2.2G, 10~55Hz/min for 10minutes in each of X,Y,Z axis.
6-7	Mechanical shock test	The Vibrator that is attached to a 120 gram dummy jig is dropped to a steel floor 12 times(6face, 2times in each of X,Y,Z axis) from 1.5 meters in height.

### ☐ Judgement

① After test, The following specifications must be satisfied .

-Acceleration : Within initial Value  $\pm 30\%$

-Rated Current : Max 80 mA rms

② There should be no abnormalities in appearance and structure.




## **7. Cautions for Use**

- (1) Do not press the product with more than 0.5Kgf or drop it.  
It can cause the transformation of performance or external appearance.
- (2) Do not use under the following conditions. It may cause a decline in performance.
  - Do not drop into fluid (such as water, alcohol etc.).
  - Do not keep at high temperature or high humidity for extended periods of times.
  - Do not use near gases which cause erosion
  - Please refrain from operating the vibrator near magnetic devices.
- (3) The vibrator has a strong magnet. So please be aware that it has a magnetic force on the surface of the bracket.
- (4) To optimize the vibration force, Rated frequency and voltage could be changed as to assemble condition.
- (5) Please refer to the packaging drawing. It can be modified by the request of the user.
- (6) The storage condition is 5℃~35℃, 15%~65% RH, 1year about packing.




## 9. Packing


[Pet Tray]

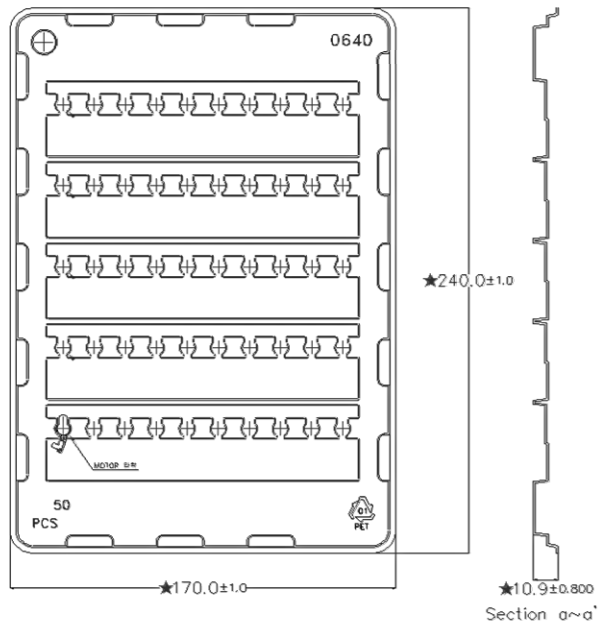

20(21) Trays  
+2 Pads

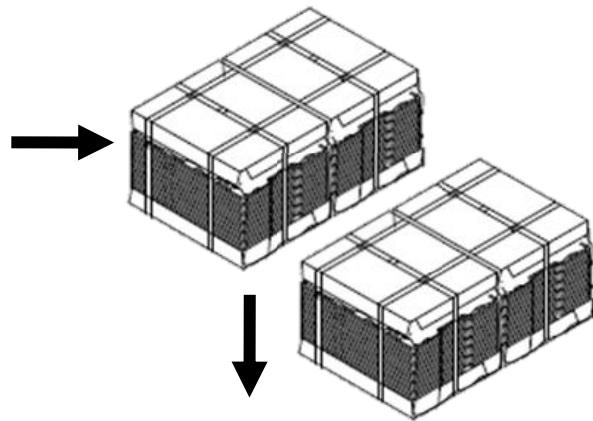

[Carton Box]



[Packing quantity]

- 50ea/ Tray
- 1 Carton box
  - 80(84) trays with a dummy tray on the top
  - 4000ea/ carton box

No	Material	Size	Q'ty/Lot	How to Pack
1	PET Tray	240x170x10.9	80(84)	●80(84) trays are packed with packing vinyl.
2	Carton Box	510x350x175	1	● The trays are bound with pad and pp band
3	Pad		8	●One bound trays are put to a carton.
4	Packing vinyl		4	● Lot Numbering
5	PP-band		-	●Delivery
				●Loading Capacity : 12