


技术要求/Technic requirement

1. 额定电压/Rated voltage: 3.0V
2. 额定电流/Rated current: 40mA Max
3. 额定转速/Rated speed: 9500 ± 2000 rpm
4. 堵转电流/Stall current: 75mA Max
5. 端子阻抗/Terminal resistance: 50Ω (±20%)
6. 起动电压/Starting voltage: 1.7V Max
7. 导线规格/Lead wire spec: AWG30 UL3302
8. 轴向间隙/Shaft end play: 0.05~0.2mm
9. 所有尺寸为A向压紧后的尺寸(不包括轴向间隙) / Overall length is measured after counterweight being pressed against body in direction A. (Shaft end play is not included.)
10. 未注线性公差为/Unmarked tolerance: ±0.1mm

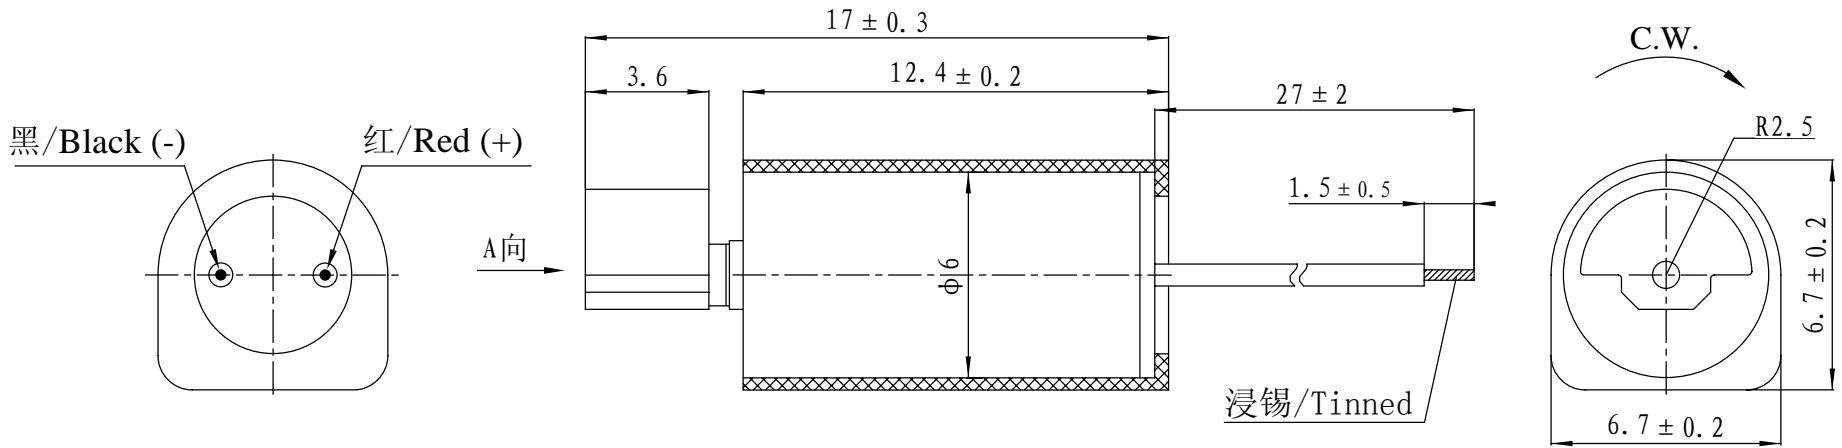

借(通)用件登记

底图总号

签字

日期

标记	处数	分区	更改文件号	签名	日期
设计			标准化		
校对					
审核					
工艺			批准		

www.vybronic.com

Vybronic

外形图

VZ6DL2B1501193

阶段标记 重量 比例

5:1

共 页 第 页