


技术要求/Technical requirement

- 1.额定电压/Rated voltage:3.0V
- 2.额定电流/Rated current:70mA Max
- 3.额定转速/Rated speed:10000±2000 rpm
- 4.堵转电流/Stall current:105mA Max
- 5.端子阻抗/Terminal resistance:35Ω(±20%)
- 6.起动电压/Starting voltage:1.7V Max
- 7.轴向间隙/Shaft end play:0.1~0.3mm
- 8.导线规格/Lead wire spec: AWG30 UL1571
- 9.所有尺寸为A向压紧后的尺寸(不包括轴向间隙)
/Overall length is measured after counterweight
being pressed against body in direction A. (Shaft
end play is not included.)
- 10.未注线性公差为/Unmarked tolerance: ± 0.1mm

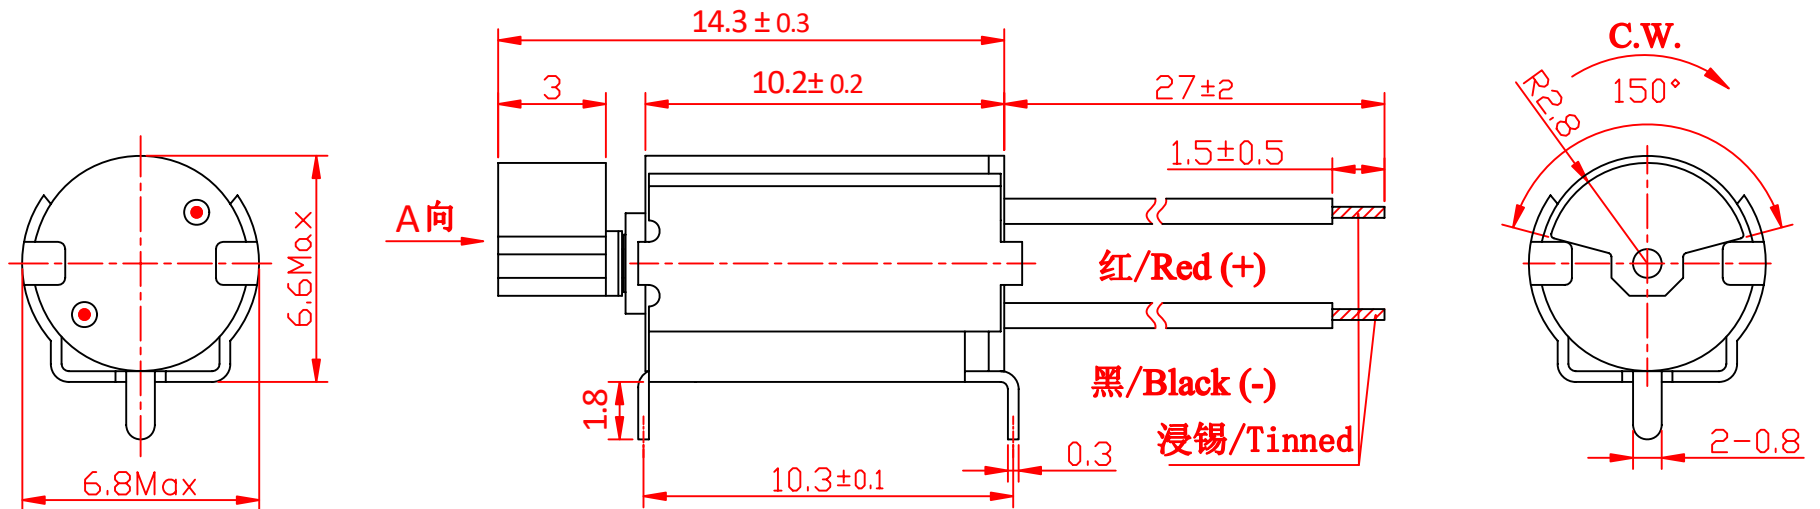

借(通)用件登记

底图总号

签字

日期

						www.vybronic.com			Vybronic	
标记	处数	分区	更改文件号	签名	日期				外形图	
设计			标准化			阶段标记	重量	比例		
校对								5:1	VZ6SL2B0060071	
审核						共 页		第 页		
工艺			批准							